




DAB Car Radio Converter KADABCONVA

Caution: to reduce the risk of electric shock, do not remove any covers. There are no user-serviceable parts inside. Refer any servicing or repairs to the Kogan customer support team.

Important Safety Instructions

- Read and keep these instructions available for future reference.
- For indoor use only.
- To reduce the risk of fire or electric shock, do not expose this unit to rain or moisture.
- Do not install unit near any heat sources.
- To clean the radio, wipe the outer casing with a slightly moistened, lint-free cloth. Do not use any cleaning fluids containing alcohol, ammonia or any other abrasive chemicals.
- Do not spray an aerosol at or near the radio.

Control Layout

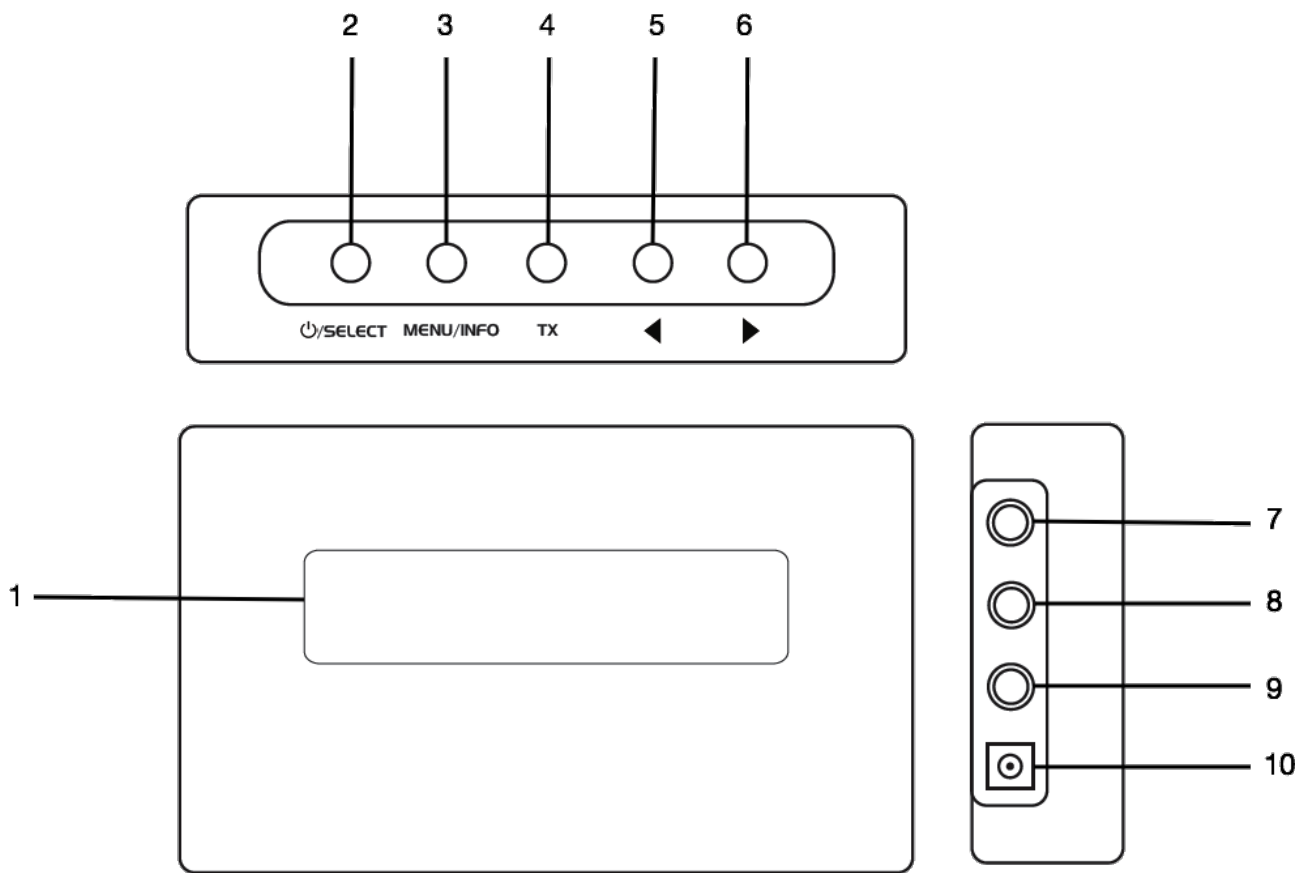


- 1: LCD Display
- 2: Standby/Select
- 3: Menu/Info
- 4: FM Transmission
- 5: Back

- 6: Forward
- 7: Antenna Jack
- 8: Audio Out Jack
- 9: Audio In Jack
- 10: DC Jack

Installation

1. Assemble the cradle
Assemble the cradle by hooking up the stand into the holder.
2. Secure the radio unit into the cradle.
3. Connect the supplied USB cable to the DC jack located on the side panel of the KADABCONVA, and into the USB jacks on the cigarette-lighter power plug. Please refer to the Control Layout section for the side view of the adaptor.
4. Plug the cigarette-lighter power plug into the cigarette lighter of your car.
5. Install the external antenna as shown in the diagram below:

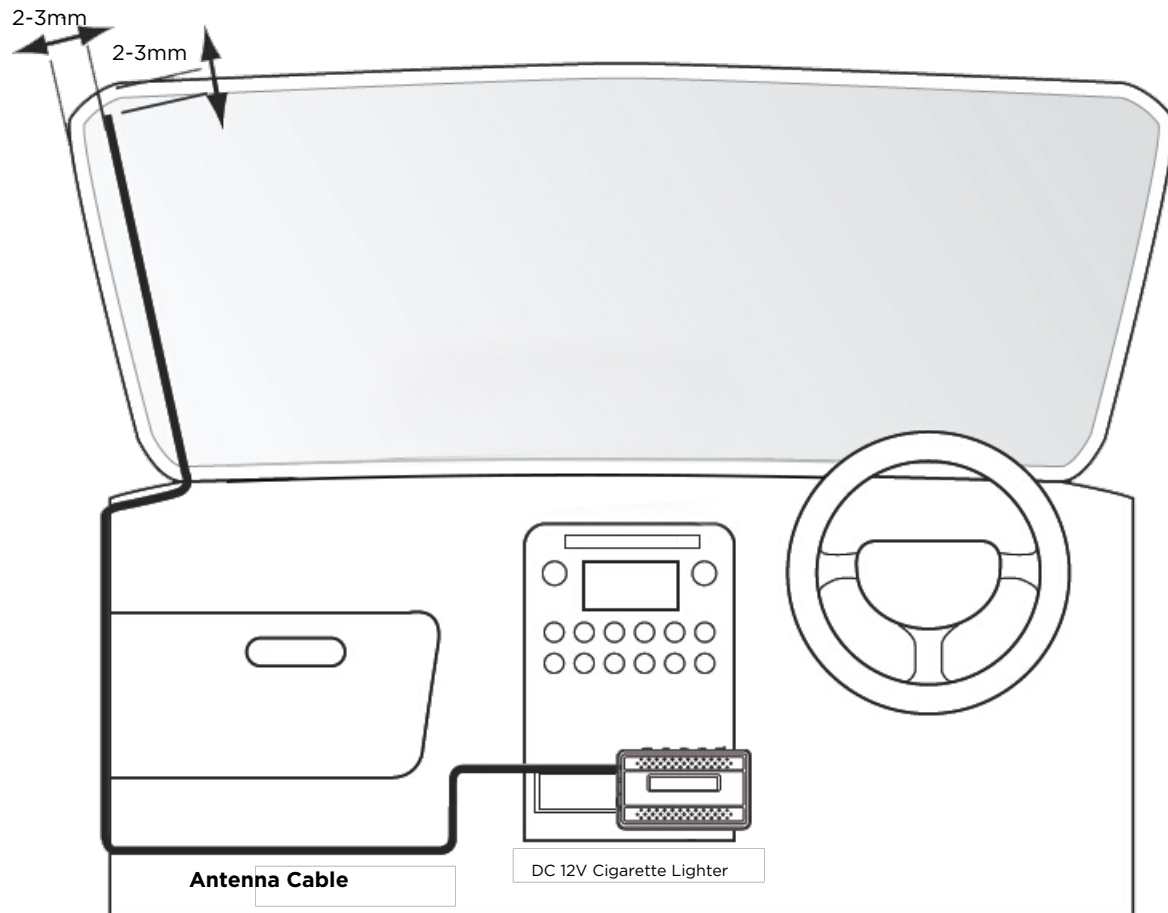

Usage

1. Turn on the radio.
2. The unit will perform a full scan of available DAB stations automatically.
3. Press the FM TX button, then the screen will show the current FM transmitting frequency. The default frequency is 87.5MHz, however you can change it manually so it better suits the area that you are in.
4. Turn your car radio on.
5. Switch the car radio's FM frequency to match the transmitting frequency setting.

If you hold down the MENU/INFO button, you will see a few options:

- Reset: reset the DAB stations.
- Volume: volume control.
- Full Scan: start a full scan of the DAB stations.
- Manual Scan: do manual tuning of DAB stations.

Using AUX input

1. Connect an AUX connection cable (not supplied) from the audio-out jack of your personal player (such as a mobile phone or MP3 player) into the AUX input jack.
2. Turn on your player to begin playing music and controlling the volume.

Using AUX output

1. Connect the AUX connection cable (not supplied) from the audio-out jack of the KADABCONVA unit into the AUX input jack of your car radio.
2. The audio signal from the car DAB adaptor will be transferred to your car speakers.

Product Specifications

Model: KADABCONVA
Input: 12V - 24V | 27W
USB 1 Output: 5V 1.8A
USB 2 Output: 5V 1A

If you have any further questions or concerns regarding the use of this product, please contact the Kogan.com customer support team.