





## Dual Rear View Reversing Camera KARVSDLCAMA



Please note: we recommend installation by a licenced auto electrician

### Bracket Installation

1) Fix the monitor into the bracket using the screws.

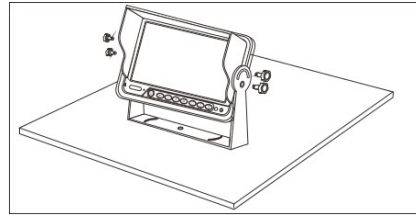
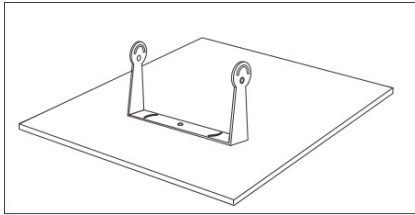


2) The angle can be freely adjusted 30° forward or backward.

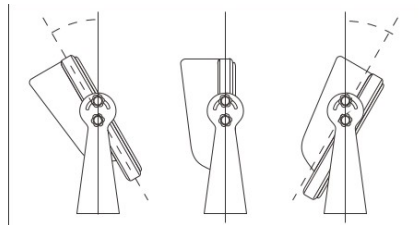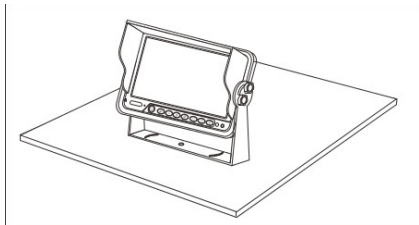

### Wiring Installation


#### RCA Connector

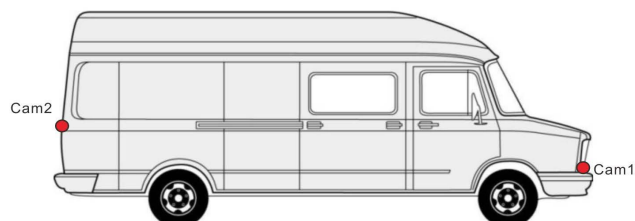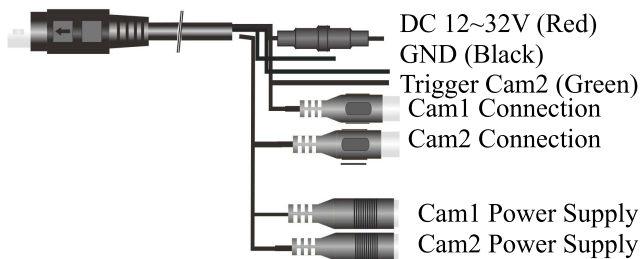

# Camera Controls

- ⏻ Power On
- AV Video Switch
- L/R Image Normal/Mirror
- M Menu
- Analogue Decrease
- + Analogue Increase

# Remote Controls

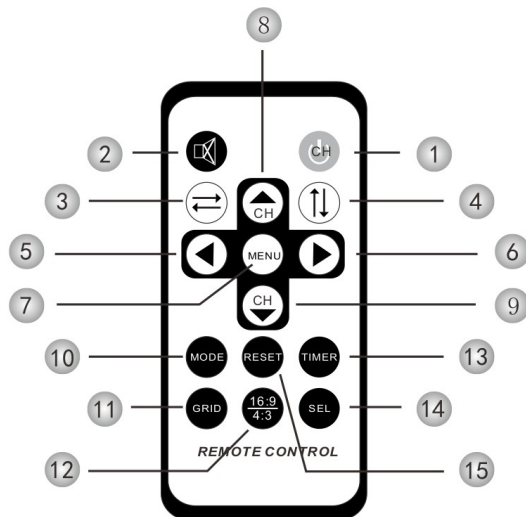

- |                                    |                          |
|------------------------------------|--------------------------|
| 1 Power On                         | 9 Analogue Decrease      |
| 2 Mute                             | 10 Mode                  |
| 3 Horizontal Mirror / Normal Image | 11 Guide Lines           |
| 4 Vertical Mirror / Normal Image   | 12 16:9 / 4:3            |
| 5 Volume Down                      | 13 Timer (0~240 minutes) |
| 6 Volume Up                        | 14 AV Switchover         |
| 7 Menu                             | 15 Reset                 |
| 8 Analogue Increase                |                          |


# Menu

Press "Menu" button to cycle through menu screens.

Press up and down to select feature and left and right to adjust.



Brightness 0 - 100  
 Contrast 0 - 100  
 Colour 0 - 100  
 Language Optional  
 Reset




S-Colour PAL / NTSC / AUTO  
 ACC1-TIME  
 ACC2-TIME  
 Reversing image delay time  
 ACC3-TIME  
 Guide Lines On / Off



Volume 0 - 100



Sleep 0-240 min



Rotate Up/Down/Left/Right  
 Zoom 4:3 / 16:9

# Specifications

|              |   |
|--------------|---|
| Screen Size  | 7"  |
| Resolution   | Analogue screen:480RGB(H)x234(V)  |
| System       | PAL/NTSC/AUTO   |
| OSD Menu     | Reversing image delay time 0~15s<br>Camera mirror/ normal image adjust<br>Multi-language interface                            |
| Video Inputs | 2-way video inputs, 1-way trigger wires   |
| Brightness   | 450cd/m <sup>2</sup>  |
| Contrast     | 450:1   |
| Voltage      | DC12V~32V   |
| Features     | Reverse polarity protection<br>Independent DC12V power supply to each camera<br>AV 2 with trigger wires<br>Removable sunshade |
| Dimensions   | (LxWxH) 177x122x26mm  |