



# 900W Handheld Steam Cleaner CTSTMCLN900A Quick Start Guide

## Product Features

- **Advanced Technology:** with exclusive patented technology, high-temperature and high-pressure steam is used for clearing away dirt and stains on floor boards, windows, doors and clothes. The unit will also kill bacteria on surfaces, while being completely environmentally friendly.
- **Improved Safety:** To ensure that the unit avoids empty heating, once the water in the boiler tank is heated and evaporated, the unit will automatically shut-down the power supply. With a highly sensitive thermostat, 135C high-temperature steam is available, ensuring complete disinfection and sterilization. The safety valve has an automatic pressure release function ensuring that excessive pressure will not build up inside the unit.
- **Durable Construction:** The machine is manufactured with an aluminium alloy die casting boiler body with an extra-thick inner wall designed to resist high pressures.

## Product Layout

1. Body
2. Short spray nozzle
3. Safety cap
4. Steam button
5. Handle
6. Power cord and plug
7. Power indicator
8. Funnel
9. Measuring cup
10. Spray cup with round brush
11. Bent spray nozzle
12. Long spray nozzle
13. Extended connecting spray nozzle
14. General spray nozzle
15. Door/window spray nozzle
16. Towel sleeve



## Safety

- Do not allow children to use this machine. Keep the unit out of reach of children when not in use.
- This device is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person who is responsible for their safety.
- To prevent electric shock, do not immerse power cord or power plug in water or other liquids.
- The power cord and power plug should be in good condition and should not be damaged. Damaged or defective power cords and power plugs must not be used, and must be repaired or replaced.
- The product is designed only for use in households and is not suitable for industrial applications.
- Do not turn on the power supply until the tank is full of water.
- During operation, the tank mouth must be plugged hermetically and the safety cap should be tightened in position.
- While in use, the body of the unit should not be included at an angle greater than 45 degrees. Otherwise the boiling water may be sprayed out together with the steam.
- Do not direct steam towards other people, animals or electrical products.
- Before refilling the water, ensure the power cord has been unplugged from the power supply. It is necessary to unplug the power cord after the machine has been used, before it is cleaned and while it is being repaired.
- Do not add rust remover, odour counteracting agents, alcohol or detergents into the water tank.
- The filling aperture must not be opened during use.
- Never overfill the tank as the steam generation may be effected.

## Before Use

Unpack the product.

Read the user manual carefully.

Check the accessories to ensure that all accessories have been provided.



Accessory	Qty
Funnel	1
Measuring Cup	1
Extended Connecting Spray Nozzle	1
Towel Sleeve	1
Long Spray Cup	1
Spray Cup for Doors/Windows	1
Spray Cup with Round Brush	1
Bent Spray Cup	1
Quick Start Guide	1
Spray Cup Connecting Pipe	1

## Product Specifications

Power supply rating:	AC 220-240V~ 50Hz
Tank capacity:	300ml
Max capacity of water cup:	175ml
Rated power:	900W ~ 1050W
Steam pressure:	2.5 ~ 4.2bar
Injected steam capacity:	28g/min
Overall dimensions:	250 x 140 x 230mm
Net weight:	1.85kg

## Operating Procedures

1. Unpack the product, check accessories and make sure all parts are present and undamaged.
2. Before use, read the user manual thoroughly and carefully. The steam cleaner is only for household use.
3. First, place the steam cleaner on a level platform. Push the safety cover down, then unscrew the safety cap anti-clockwise, as shown below. Then install the funnel.

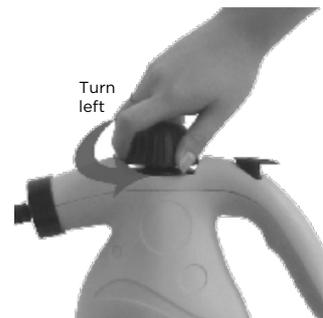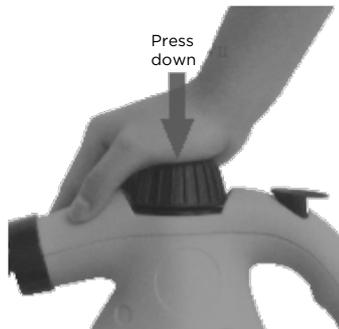

4. Take 175ml of clean water with the measuring cup and then add the water into the tank. (Max. capacity of the tank is 300ml. Do not overfill the tank, and note that some space must be left in the tank.) Replace the safety cap and tighten it into position.
5. Check the power supply and socket to make sure they are plugged in securely. Then turn power supply on.
6. After about 4 minutes, the steam will be ready. To confirm this, lightly press the steam button and check that steam vapors are being sprayed out of the nozzle. (Do not aim the nozzle at other people or animals).
7. If steam vapors are coming out, release the steam button and install whichever accessory is required for your use.
8. Once the accessory is fitted, press the steam button again to use product.

# Installation of Accessories

## Long Spray Cup

Hold the pipe section of the long spray cup in your hand, aligning the arrow on the spray cup with the single-line mark on the short spray nozzle on the machine body, then insert the spray cup into position. Rotate the spray cup in a clockwise direction, aligning the arrow on the spray cup with the double-line mark on the short spray nozzle on the machine body, as shown in Figure 1. Fix the spray cup to the machine body.

To remove the long spray cup, please rotate the spray cup anti-clockwise, as shown in Figure 2. Align the arrow on the spray cup with the single-line mark on the machine body, then the long spray cup can be pulled out.

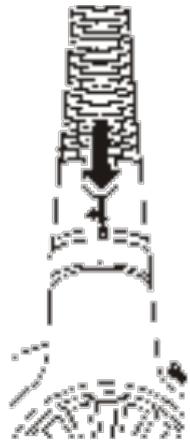


Fig. 1



Fig. 2

## Spray Cup with Round Brush or Bent Spray Cup

For direct installation on the short spray nozzle, aim the spray cup with the round brush or the bent spray cup at the top of the spray nozzle, as shown in Figure 3. Push the spray cup upwards until it is in position. As the short spray nozzle and spray cup are positioned in six directions, the angle and direction can be adjusted during installation.

The spray cup with round brush and the bent spray cup and long spray cup can be installed in the same way as the installation on the short spray nozzle.

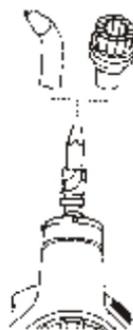


Fig. 3

## Spray Cup for Doors/Windows

As shown in Figure 4 and Figure 5, install the two small hooks of the spray cup for doors/windows, then connect the trigger for the big hook. Then push the spray cup for doors/windows up and attach it onto the body of the general spray nozzle.

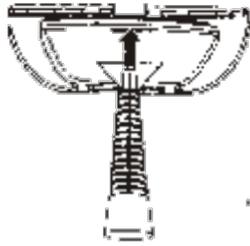


Fig. 4

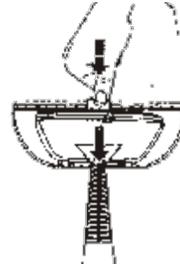


Fig. 5

## Refilling Water during Operation

1. Unplug the power cord and disconnect the unit entirely from the power supply.
2. Press the steam button down to release all pressure until steam is no longer being ejected from the unit.
3. Slowly unscrew the safety cap but DO NOT remove it. Residual steam vapors will be discharged slowly, then eventually no more steam will come out. Place the unit in a cool location to allow it to cool further for five minutes. Finally, completely remove the safety cap.
4. Use the funnel and measuring cup to refill a suitable quantity of cold or hot water into the tank.
5. Replace the safety cap onto the unit and tighten it back into position.

## After Use

1. Once the job has been completed, unplug the power cord and disconnect the unit entirely from the power supply.
2. Press the steam button down to release all pressure until steam is no longer being ejected from the unit.
3. Slowly unscrew the safety cap but DO NOT remove it. Residual steam vapors will be discharged slowly, then eventually no more steam will come out. Place the unit in a cool location to allow it to cool further for five minutes. Finally, completely remove the safety cap.
4. Empty residual water from the tank and clean the external surface with a dry cloth.
5. Replace the safety cap back onto the unit, and tighten it into position.

**If you have any further issues or questions regarding use of this product, please contact the Kogan customer support team.**